




DIMENSION

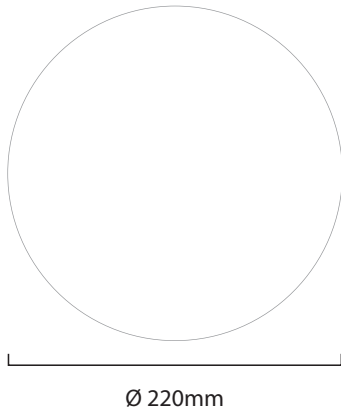

PRODUCT

Name	CFR LED panel Light
Reference	EI-CFR-32W
Body color	White
Material	Aluminum
Category	Surface

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3520Lm
Power	32W
Colour temperature CCT	3000 / 4000/ 7000 K
Colour Rendering Index	CRI =80
Light beam angle	120°
Number of LEDs	360
Chip Type	SMD2835
Dimming	Non Dimmable
Median useful Life	30,000 hours


OTHER DATA

Light Guide Panel (LGP)	Polystyrene (PS)
Ingress Protection	IP20
Dimension (mm)	Ø 220mm

DRIVER OPTIONS

ON / OFF	
Class II	
Frequency (Hz)	50/60 Hz
Power Factor	0.6
Mains voltage	AC 85-265V
Ingress Protection	IP20
Isolated Driver	Yes

PHOTOMETRIC DETAILS



1m	300.0, 1377lx	335.35lm
2m	75.0, 344.3lx	680.70lm
3m	33.3, 159.8lx	976.05lm
4m	18.75, 79.4lx	1281.40lm
5m	13.2, 67.4lx	1586.75lm
6m	8.3, 50.1lx	1892.10lm
7m	6.0, 40.8lx	2197.45lm
8m	4.7, 33.4lx	2502.80lm
9m	3.7, 28.0lx	2808.15lm
10m	3.0, 23.7lx	3113.50lm